



Simulation of a basic catalyzed continuous process for the production of biodiesel

Paz-Garcia, Juan Manuel; Rubio, A. García; Merchán, M. C. Rey; Lahoz, C. Gómez; Alonso, C. Vereda

Publication date:
2011

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Paz-Garcia, J. M., Rubio, A. G., Merchán, M. C. R., Lahoz, C. G., & Alonso, C. V. (2011). *Simulation of a basic catalyzed continuous process for the production of biodiesel*. Poster session presented at 12th Mediterranean Congress of Chemical Engineering, Barcelona, Spain.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

SIMULATION OF A BASIC CATALYZED CONTINUOUS PROCESS FOR THE PRODUCTION OF BIODIESEL

J. M. Paz García¹, A. García Rubio², M. C. Rey Merchán², C. Gómez Lahoz² and C. Vereda Alonso²

¹Dpt. of Civil Engineering, Technical University of Denmark (DTU), Lyngby, Denmark

²Dpto. de Ingeniería Química, Universidad de Málaga. Málaga, Spain.

Introduction

This work presents a preliminary design study of a conventional biodiesel plant using the alkaline homogeneous catalysis. The plant is designed for the treatment of 1 kmol h⁻¹ of triolein (more than 7000 tons / year), which is chosen to represent the vegetable oil. The usual methanol to oil molar ratio (6:1) for the alkaline homogeneous catalysis is assumed. The study is performed using the process simulation software HYSYS 2006.5 developed by Aspen Technology, Inc.. The process flowsheet diagram is presented below, in which the more remarkable information for the simulation is showed.

Kinetics of the homogeneous catalyzed transesterification reactions



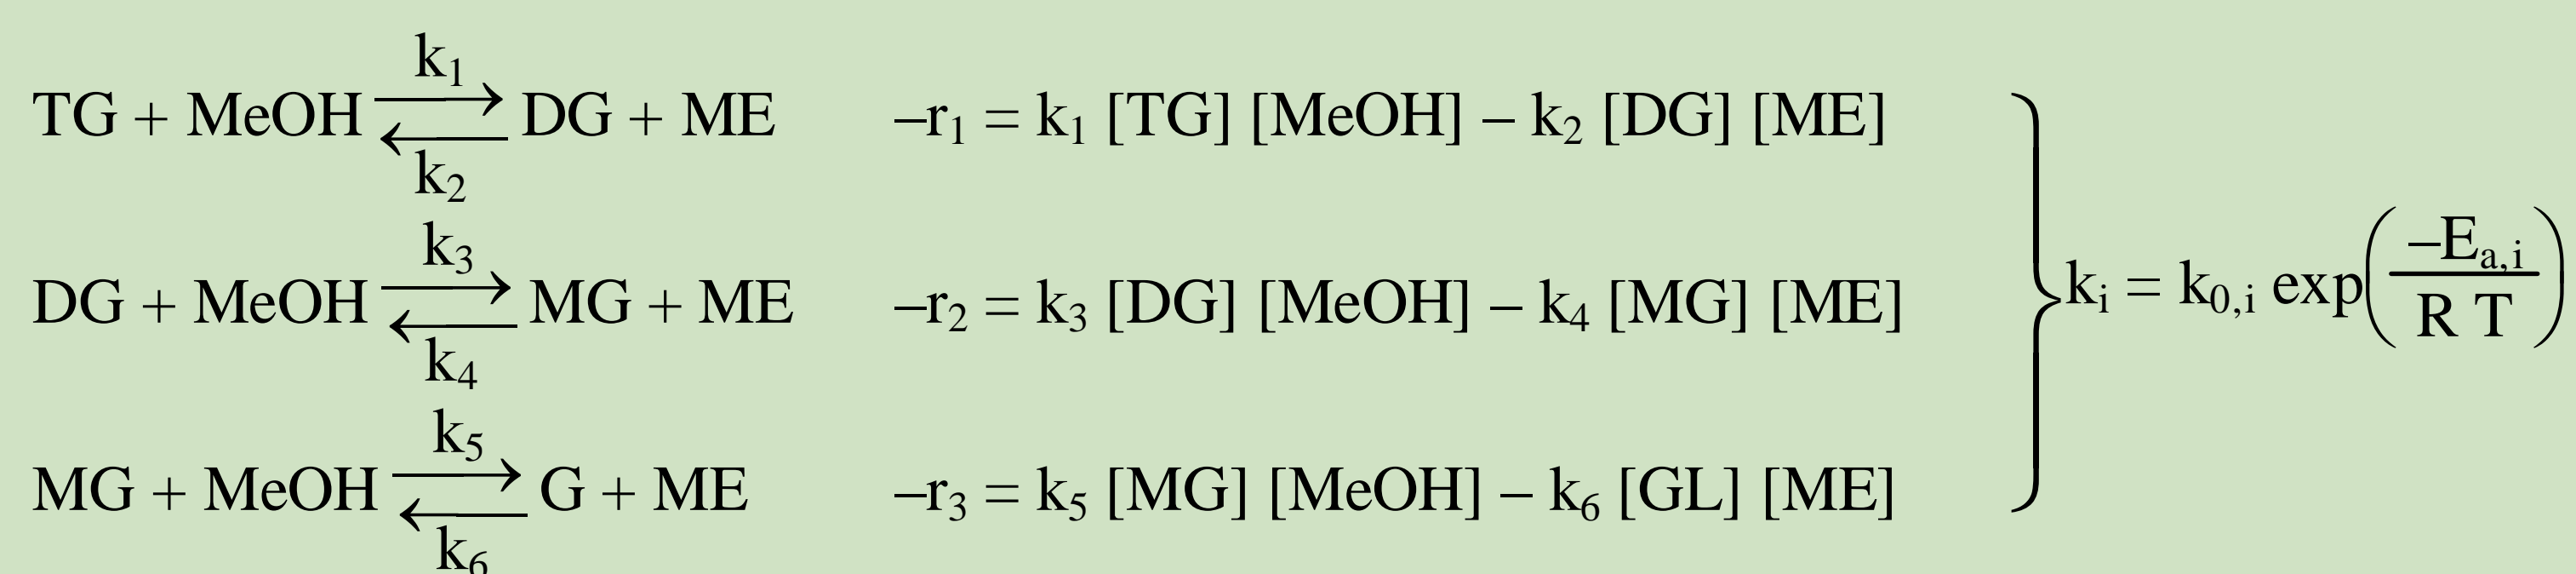


Table 1. Arrhenius' parameters for the kinetics from (Vicente et al., 2005)

	k ₁	k ₂	k ₃	k ₄	k ₅	k ₆
k _{0,i} (m ³ kmol ⁻¹ s ⁻¹)	7.37 10 ⁹	2.12 10 ¹⁰	4.55 10 ¹⁴	2.60 10 ¹⁴	1.17	N.R. ^a
E _{a,i} (J/mol)	72891	71413	95690	94653	13713	N.R. ^a

^a Not reversible.

Influence of the water to biodiesel mass ratio on the concentration of methanol in the biodiesel product at the water washing column, in which glycerol and methanol are separated from biodiesel. A 40 ‰ water to biodiesel ratio and 5 equilibrium stages allow a methanol content in the biodiesel stream below 0.3%.

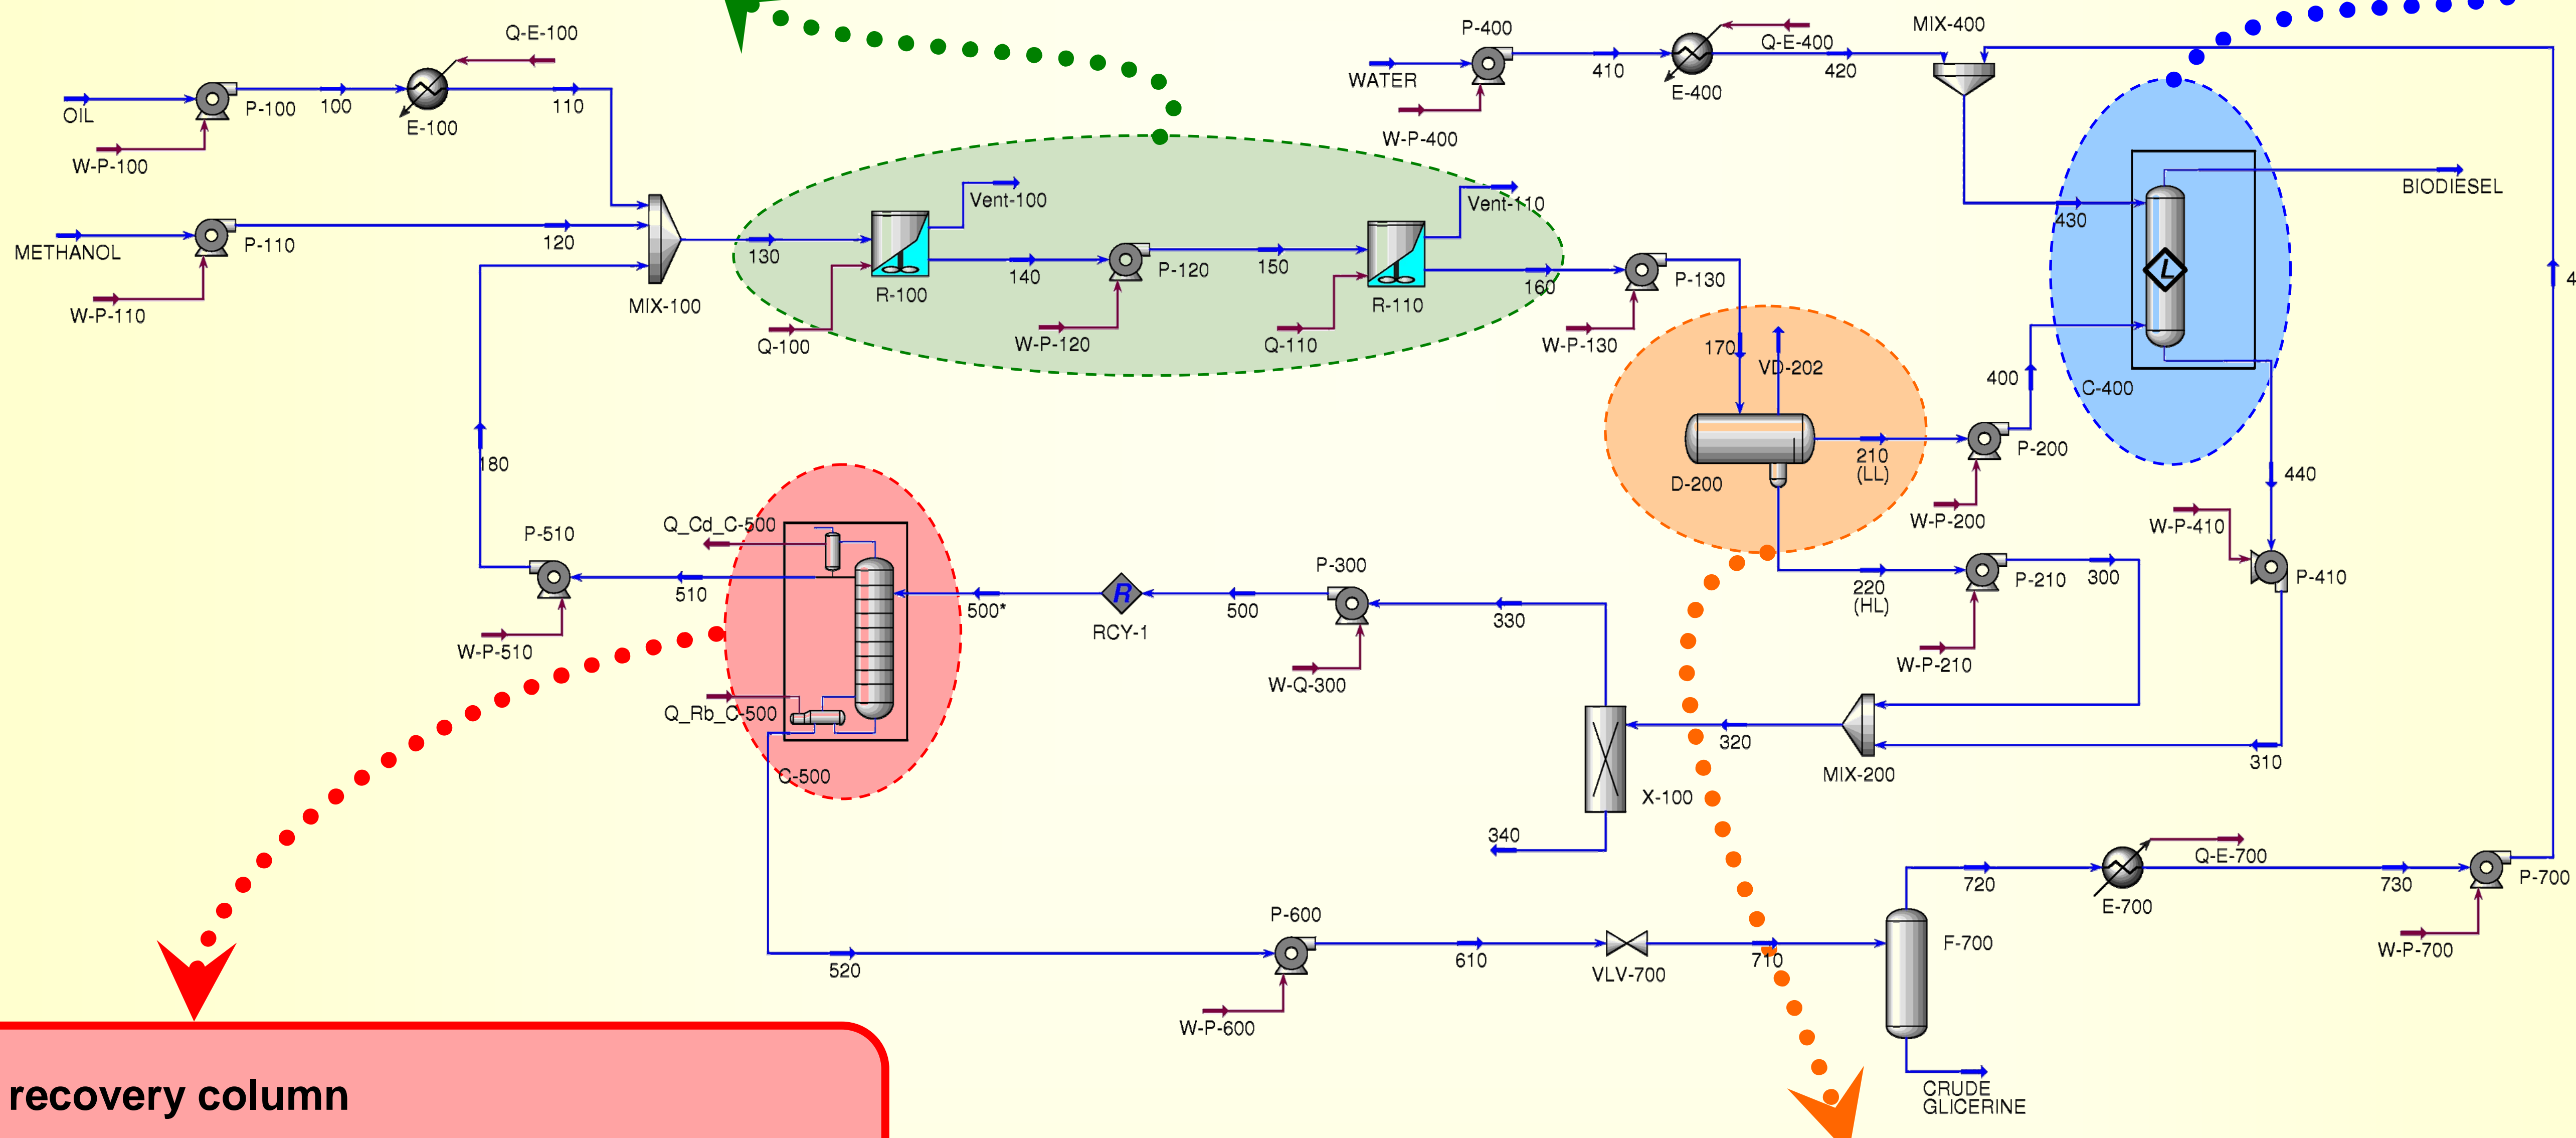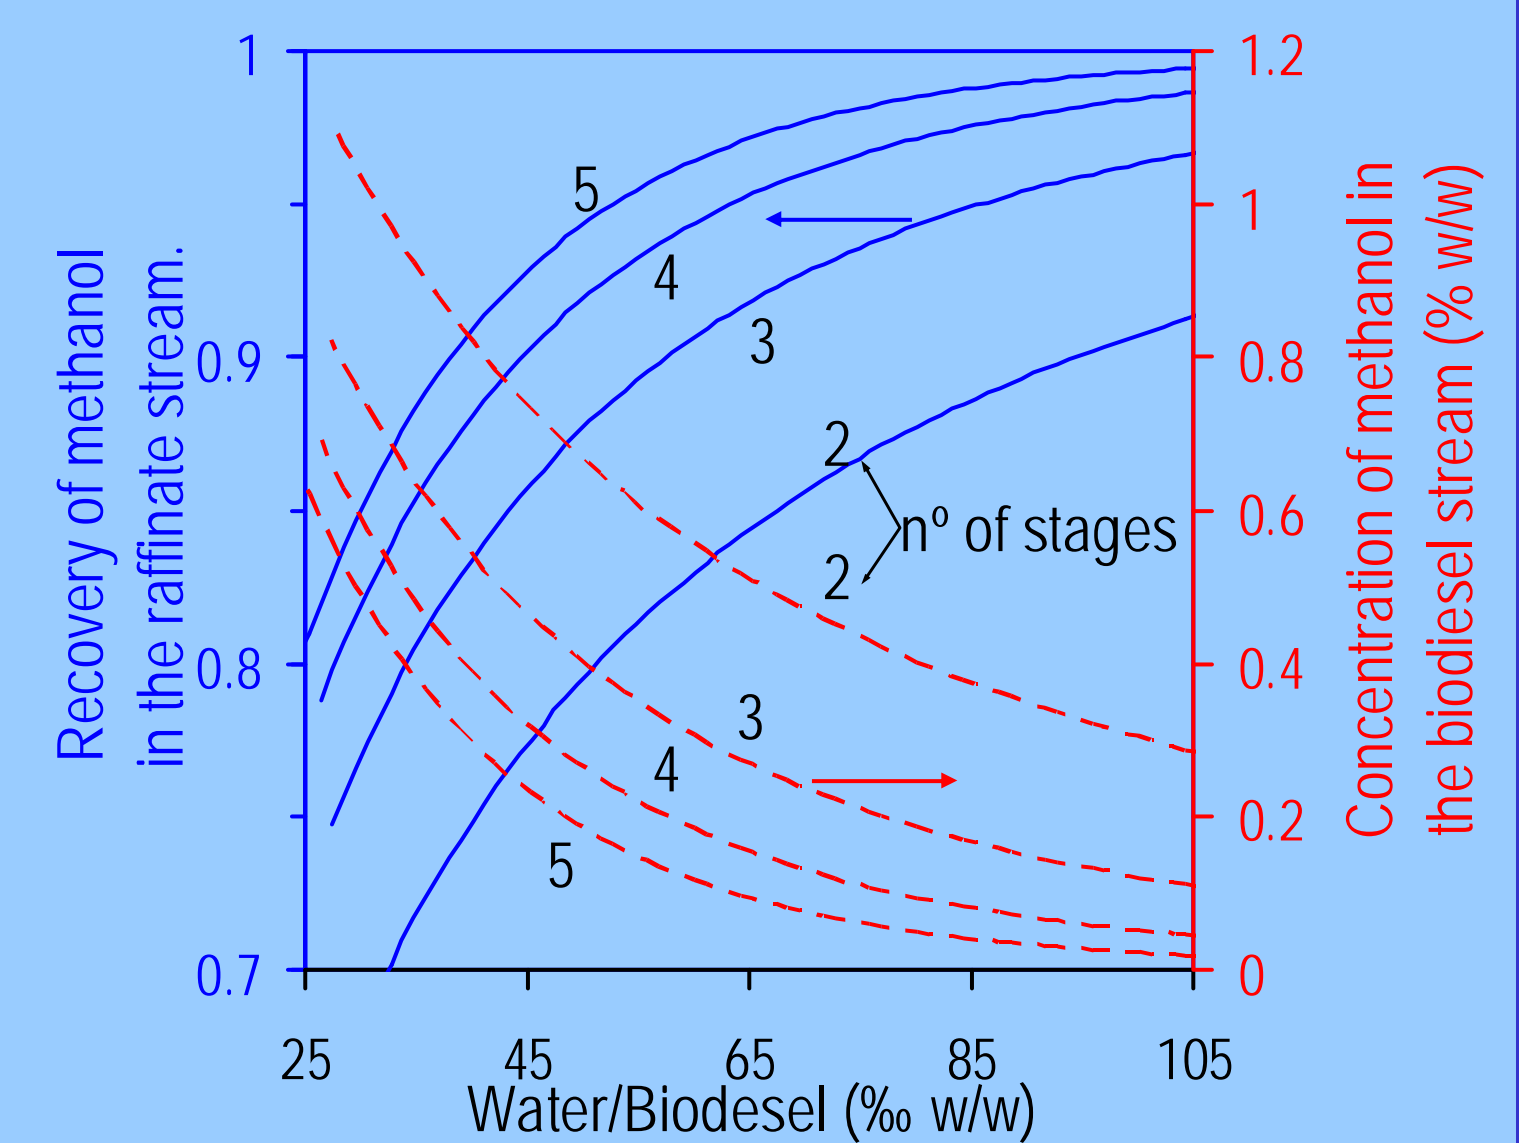


Methanol recovery column

The methanol recovery is performed in a packet distillation column, because the biodiesel capacity production of this plant is not very high. According to the rigorous model of HYSYS, 18 equilibrium stages are needed for a recovery of 99.9% of methanol. If the packing material is 3" Raschig rings, the column size is 0.6 m diameter by 8 m height (HTEP=0.43 m), according to the empirical correlation used by HYSYS, which is based on the flooding velocity.

Thermodynamic predictions for the settler

The reliability of the partition of the main components predicted by HYSYS in the settler is assessed by the comparison of the simulation results with the experimental results from Negi et al. (2006) for the liquid-liquid phase equilibrium in the ternary system at 60 °C.

The density values calculated by the property package of HYSYS are incorrect to such an extent that the density value of the glycerol phase can become lower than that of the methyl ester phase. Therefore the tabular package in conjunction with the property package should be used, in this case density was calculated applying the default mixing rule in mole basis with mixing parameters (*f*) equal to -1.

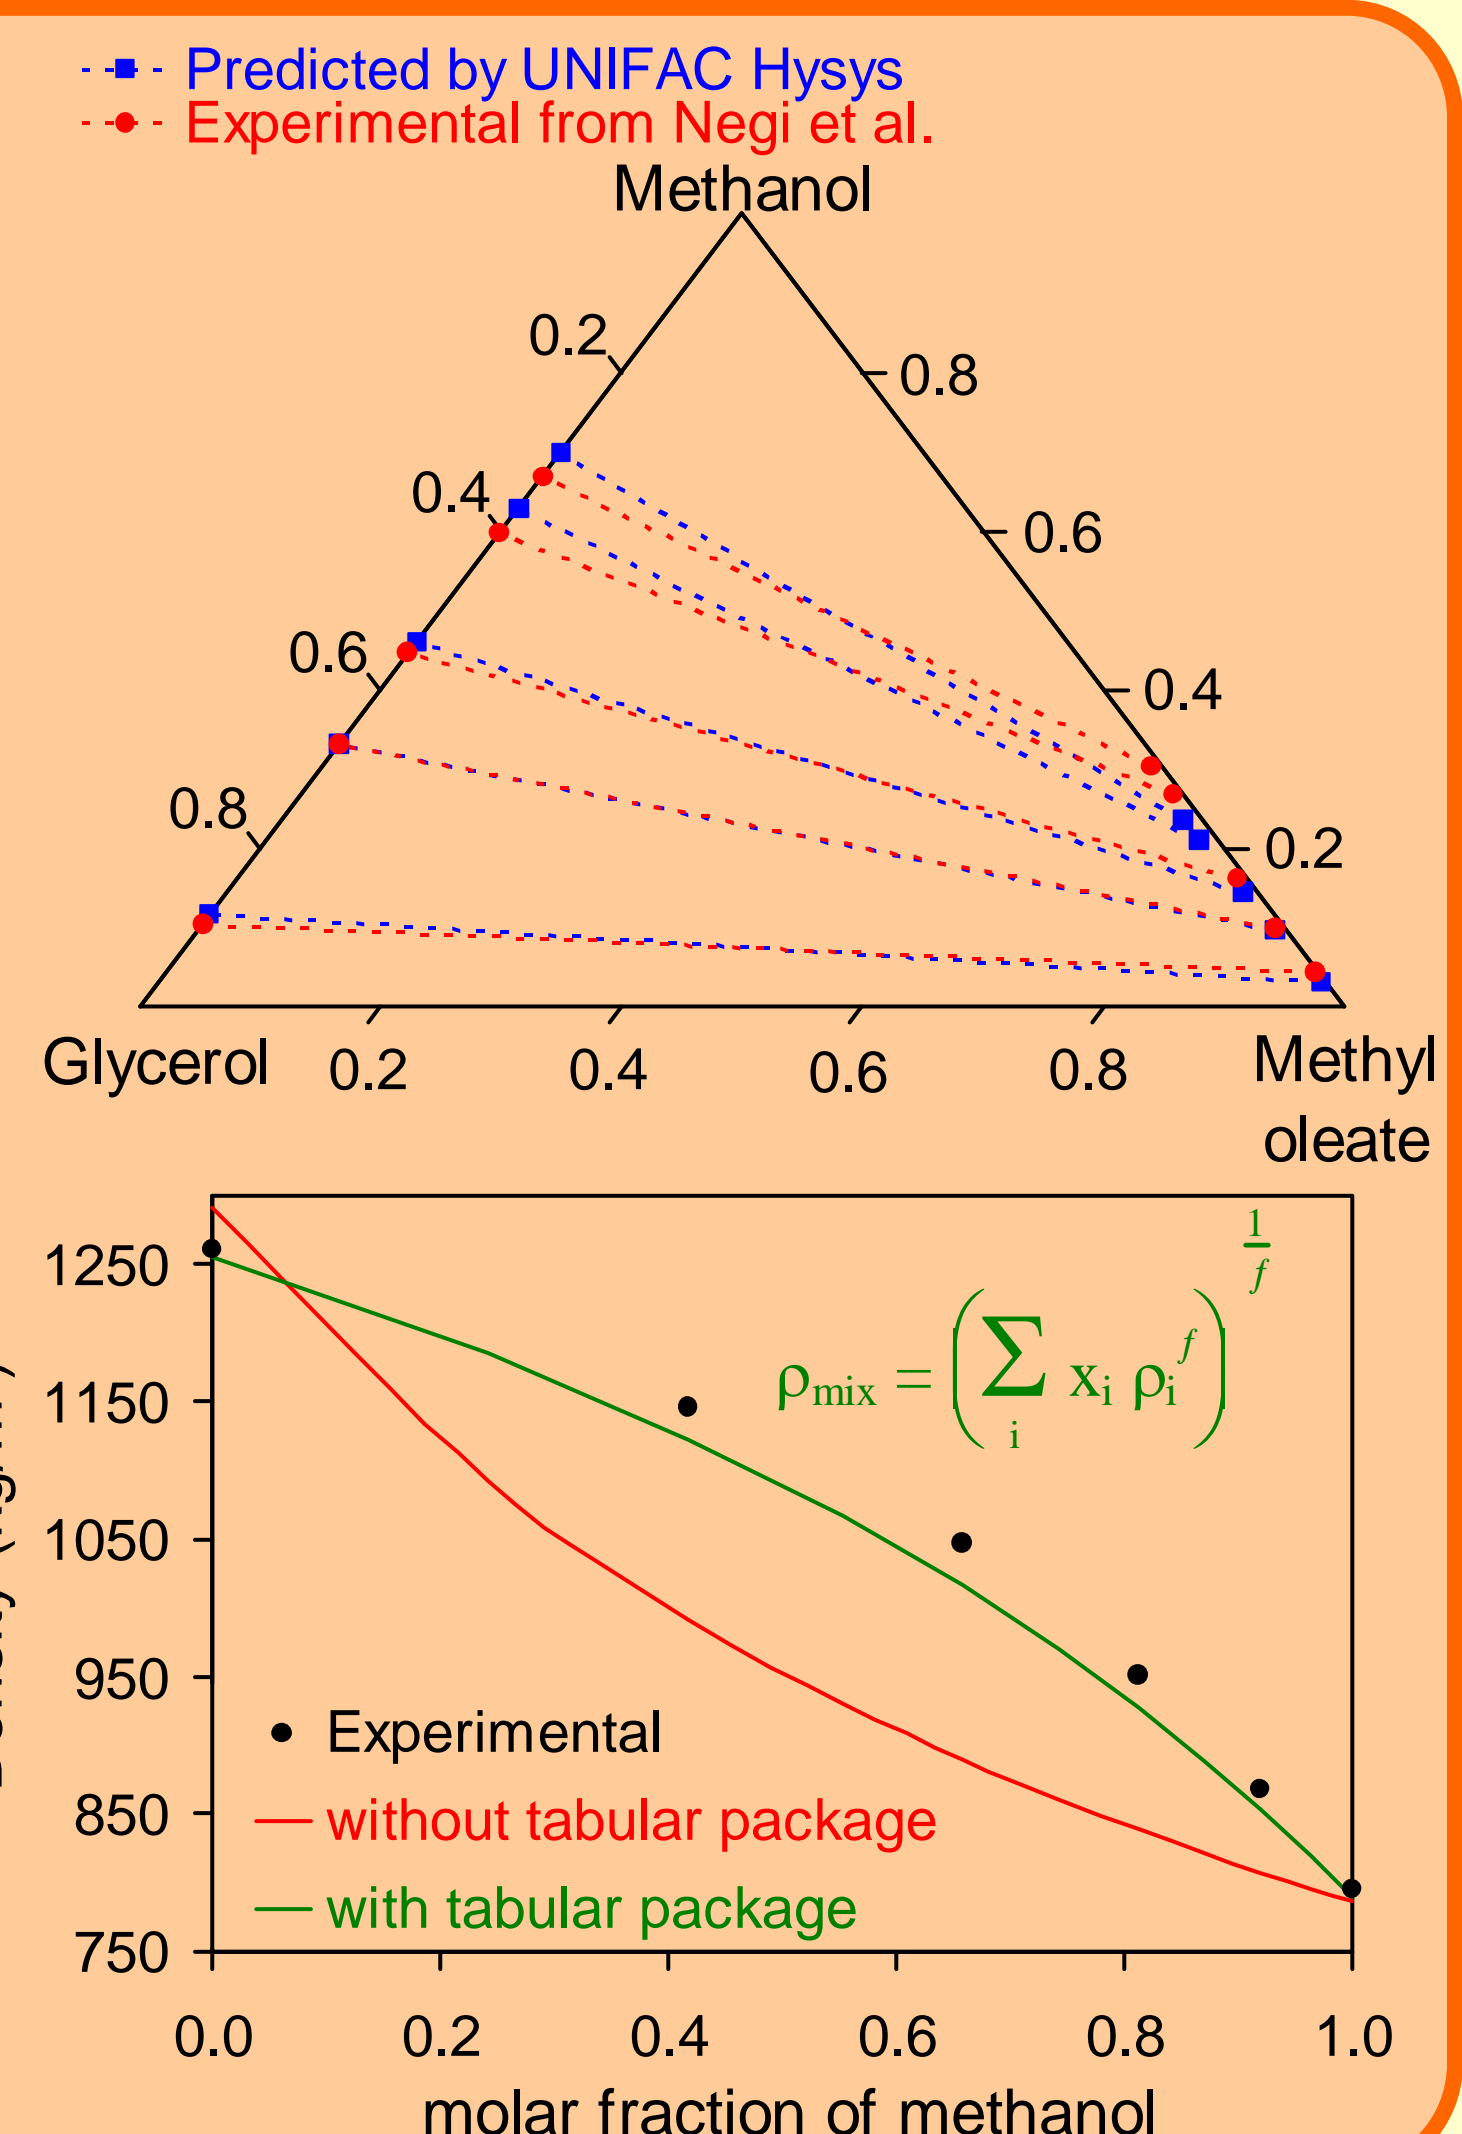

Acknowledgement

This work was performed using an academic license of HYSYS acquired by the University of Málaga and kindly provided by Aspen Tech.

